


014616 GPS Antennas - Module Antennas - HAG-MS25-A-3V -

仕様

Model	HAG-MS25-A-3V
ANTENNA ELEMENT	
Center Frequency	1575.42 MHz \pm 1.023 MHz
Polarization	R.H.C.P.
Gain @ Zenith	+4dBi typical
Axial Ratio	3dB max
Impedance	50 Ω
LOW NOISE AMPLIFIRE	
Frequency	1575.42 MHz \pm 1.023 MHz
VSWR	Less than 2.0
Impedance	50 Ω
LNA Gain	25dB (\pm 2dB)
Noise Figure	2.0dB (max)
Band Attenuation	20dB min @Fo \pm 50 MHz
Voltage	DC +3V (\pm 10%)
Current	20mA (max)
MECHANICAL	
Height	6.5 mm
Width	28.0 x 30.5 mm
Cable	Miniature Cable x 50mm Other Types(Optional)
Connector	HFL Other Types(Optional)
External Connector	MOB-242
ENVIROMENTAL	
Operating Temp.	-30 $^{\circ}$ C \sim +80 $^{\circ}$ C
Storage Temp.	-40 $^{\circ}$ C \sim +90 $^{\circ}$ C
APPLICATION: Car Navigation, Portable Navigation	

製品写真

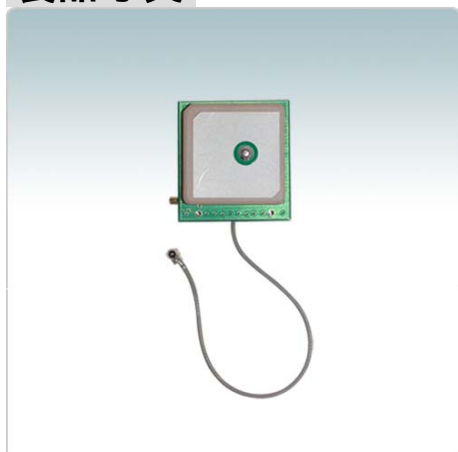

寸法図

